
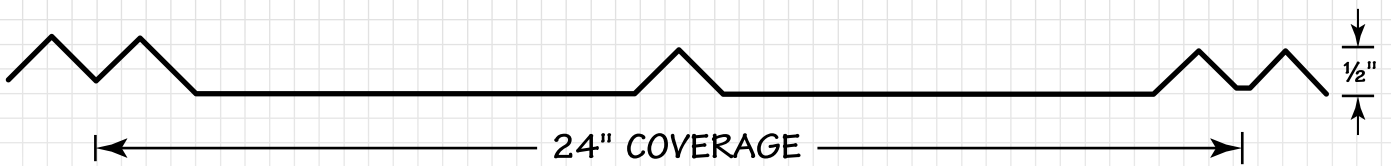


5V™

Residential & Light Commercial Roof Panel

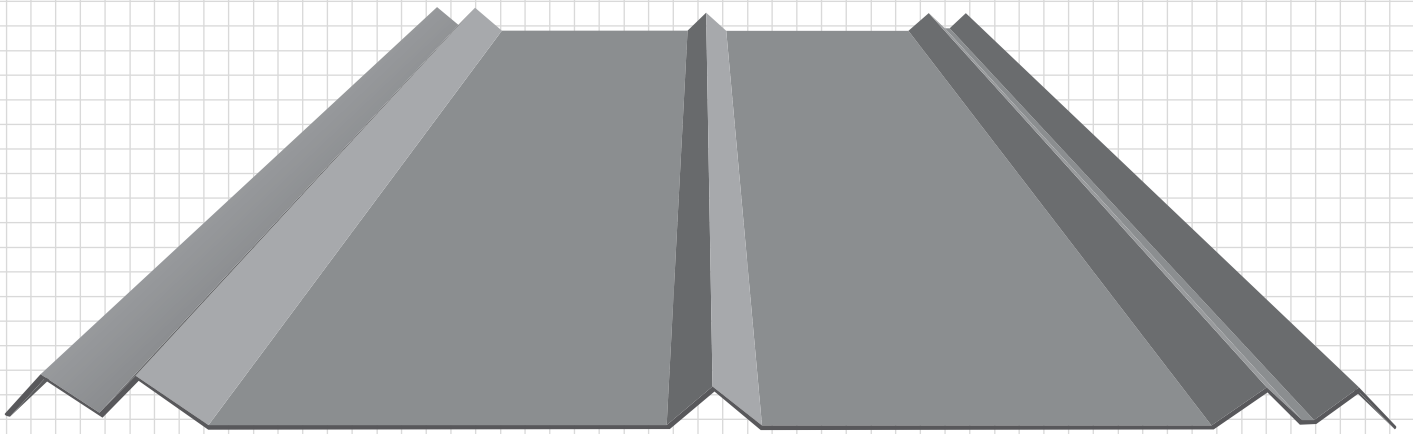

5V™


Residential & Light Commercial Roof Panel

The 5V™ panel continues to be a proven favorite for residential, agricultural and light commercial roof applications. This low-rib, exposed fastener panel is one of the oldest metal roofing profiles in the marketplace. 5V™ has a classic appearance and is especially popular in coastal areas.

- 1/2" rib height.
- Recommended for 3/12 or greater roof slopes.
- 26 gauge available in bare Galvalume®, 29 gauge available in both galvanized and bare Galvalume®.
- 24" panel coverage.
- 30' maximum length.
- Installs over a solid substrate.
- Matching trims and accessories are available.
- Available from our Lowell, Jasper and Mount Airy facilities.

5V™ Specs

Gauge	29 or 26
Steel thickness	0.0142" (29ga G90) 0.0142" (29ga AZ55) 0.0180" (26ga AZ55)
Rust protectant substrate	Galvanized G90, acrylic coated bare Galvalume® AZ55, acrylic coated bare
Yield strength	80,000 PSI min
Warranty	25 yr Galvalume® perforation warranty on AZ55
Testing	Texas Department of Insurance Compliant for wind pressure (RC-150)

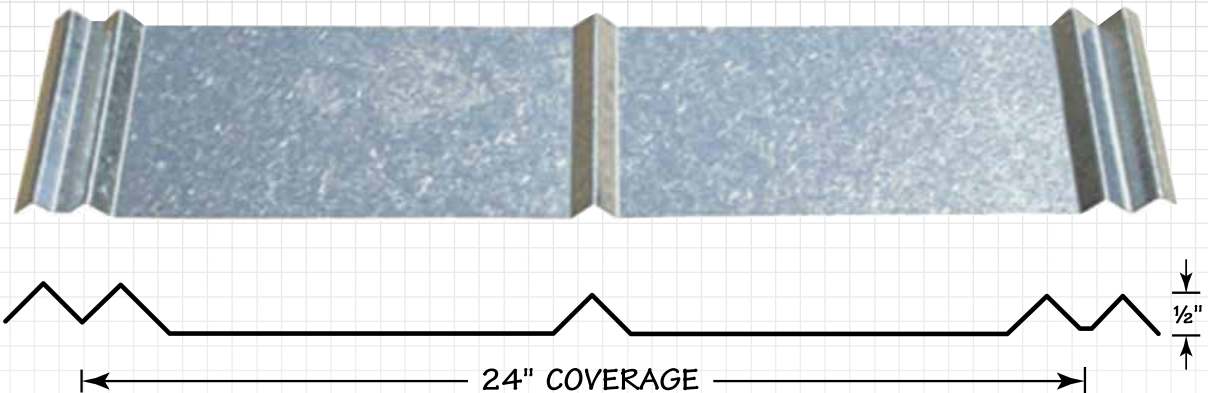

www.CentralStatesMfg.com